



UPS 43-44FC/BFC SUPERBRUTE

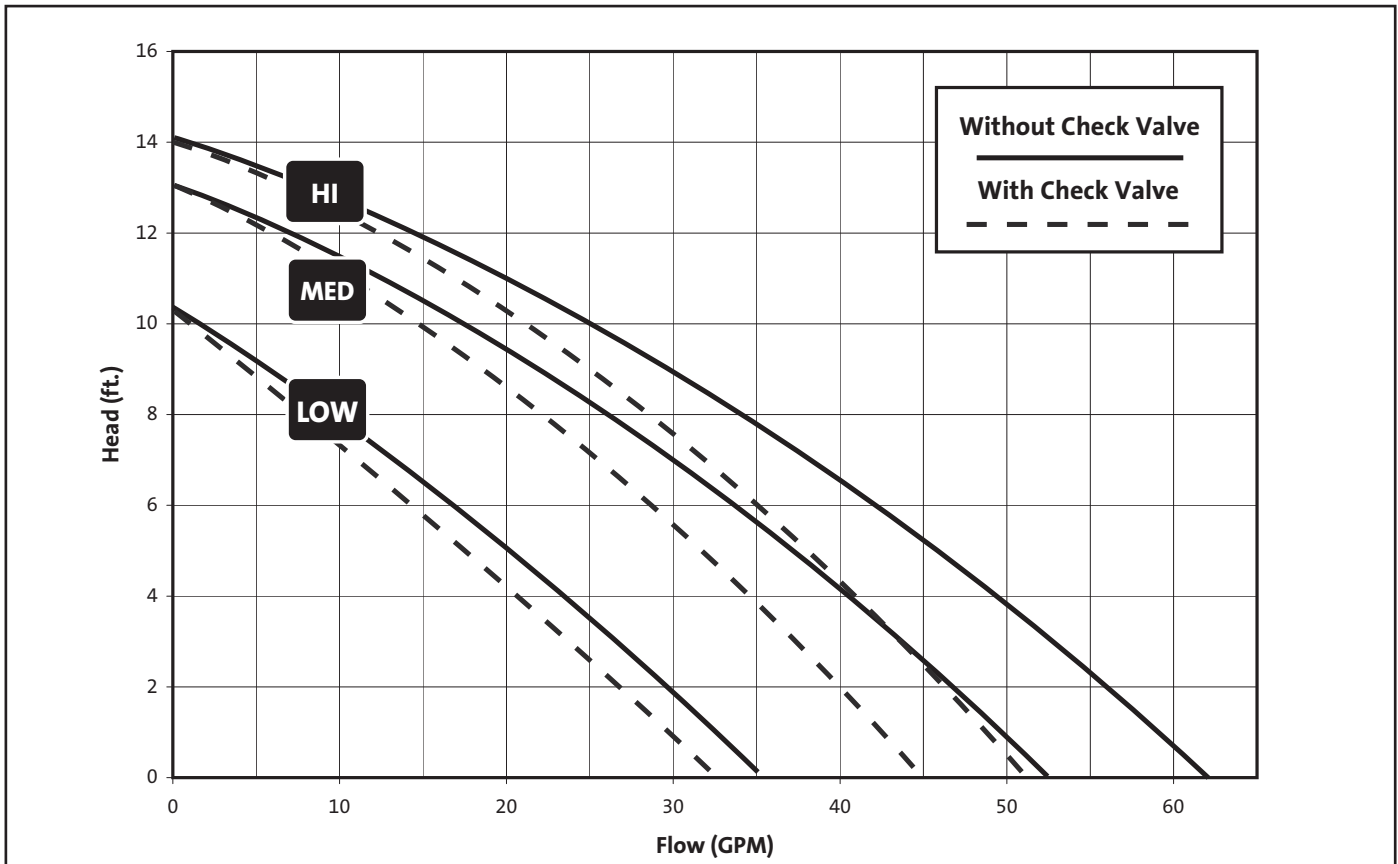

Flow range: 0 - 64 U.S. GPM
 Head range: 0 - 14 FEET
 Motors: 2 Pole, Single Phase
 Maximum fluid temperature: 230°F (110°C)
 Min. fluid temperature: 32°F (0°C)
 Maximum working pressure: 145 PSI

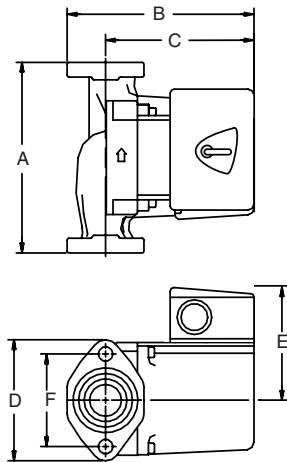

UPS43-44BFC/BFC		AMPS	WATTS	HP	CAPACITOR
115V	Spd. 3	1.8	203	1/6	20mF/180V
	Spd. 2	1.7	189	1/6	20mF/180V
	Spd. 1	1.4	157	1/6	20mF/180V
230V	Spd. 3	0.9	203	1/6	5mF/400V
	Spd. 2	0.8	190	1/6	5mF/400V
	Spd. 1	0.7	157	1/6	5mF/400V

Model Type	A	B	C	D	E	F	Connection Type and Size	Approximate Shipping Wt. (lbs)
UPS43-44FC/BFC	8 1/2	6 11/16	5 1/8	4 3/4	3 3/16	3 7/16	GF 40/43 Flange - (2) 1/2" Dia. Bolt Holes	13.6